

Sophisticated RIP software maximizes the performance of UJF-3042 MkII and UJF-6042 MkII

User friendly RIP "RasterLink 6" comes as standard

RasterLink 6

- ◆ More beautiful and advanced print results are achieved by following a user-friendly interface that is easy to operate.
- ◆ Colour replacement function enhances the ability to re-create printed images.
- ◆ Print colour can be simulated on Illustrator / Photoshop without an actual print.
- *This function requires MPM2/3 (Mimaki Profile Master 2/3).
- ◆ Program update and profile download can be easily performed via internet.



Works with PS, EPS, TIFF, BMP, JPEG etc

UJF-3042 MkII

UJF-6042 MkII

Specifications

Item		UJF-3042 MkII	UJF-6042 MkII
Head			
On-demand Piezo head			
Ink	Type / colour	LH-100 (C, M, Y, K, W, Cl) LUS-120 (C, M, Y, K, W, Cl) PR-200 (Primer)	LH-100 (C, M, Y, K, Lc, Lm, W, Cl) LUS-120 (C, M, Y, K, Lc, Lm, W, Cl) PR-200 (Primer)
	Capacity	250ml / 1,000ml	
	Ink circulation	White ink circulation by MCT (Mimaki Circulation Technology)	
Resolution	Y-dpi	600, 1,200 *1	
	X-dpi	600, 900, 1,200	
Media jam / obstacle sensor	Laser beam		
UV unit	Air-cooling LED-UV x1		
Nozzle Check Unit (NCU)	Equipped		
Mist absorption fan	Equipped		
Table	Maximum print size	300mm x 420mm	610mm x 420mm
	Max media height	153mm	
	Max media weight	5kg *2	8kg *2
	Flatness accuracy	0.5mm	0.3mm
	Vacuum	Equipped	
	Media set	Origin right	
	Movement	Table	
Distance accuracy	Absolute	± 0.3mm or ± 0.3% of the distance, whichever is larger	
	Reproducibility	± 0.2mm or ± 0.1%, whichever is larger	
	Noise	Standby: Below 55dB (FAST-A, measured 1m away from the source) Continuous operation: Below 65dB / Discontinuous operation: Below 70dB	
Standards	VCCI-Class A, FCC ClassA, ETL UL 60950-1, CE Marking (EMC Directive, Machine instruction, RoHS Directive, Low Voltage Directive), CB Report, RoHS compliance, REACH, Energy Star, IEC60825-1		
Power specification	Single-phase AC100-240V, ±10%, 50/60Hz ±1Hz		
Power consumption	Less than 800W		
Environment	Operational temperature	20 ~ 30°C	
	Relative humidity	35 ~ 65%Rh (Non condensing)	
	Accuracy guaranteed temperature	20 ~ 25°C	
	Temperature gradient	Within ± 10°C /h	
	Dust	Equivalent to office level	
Interface	USB2.0 / Ethernet 1000BASE-T		
Dimensions (W x D x H)	1,355 x 1,290 x 856 mm	1,665 x 1,290 x 856 mm	
Weight	135kg	150kg	

*1 900dpi in Y-direction is not available because of head spec *2 Including jig weight

Supplies

Item	Colour	Item No.	Remarks
LH-100	Cyan	TBA	250ml bottle
	Magenta		
	Yellow		
	Black		
	Light Cyan		
	Light Magenta		
	White		
LH-100	Clear	LH100-C-BA	1,000ml bottle
	Cyan		
	Magenta		
	Yellow		
	Black		
	Light Cyan		
	Light Magenta		
LUS-120	White	TBA	250ml bottle
	Clear		
	Cyan		
	Magenta		
	Yellow		
	Black		
	Light Cyan		
LUS-120	Light Magenta	LUS12-C-BA	1,000ml bottle
	White		
	Clear		
	Cyan		
	Magenta		
	Yellow		
	Black		
PR-200	Light Cyan	TBA	250ml bottle
	White		
	Clear		
	Cyan		
	Magenta		
	Yellow		
	Black		
PR-200	Primer	PR200-Z-BA	1,000ml bottle



⚠ Safety Notice

- You are dealing with UV light sources that may harm your health. Please follow below guidelines strictly:
- Do not look directly into the UV light source nor place your hand, or expose your skin directly to the UV light source.
 - Depending upon print mode, there might occur some VOC emittance from printed parts not yet cured and hardened.
 - Please read and follow the instructions and guidelines of the manual carefully.

⚠ Inks and substrates:

- Please note that properties and adhesion, weather resistance etc. of ink and substrates can vary. Therefore please test materials before printing.
- Some substrates require primer before printing. Please test materials beforehand or ask your sales representative.

• Some of the samples in this folder are artificial renderings • Specifications, design and dimensions stated in this folder may be subject to change without notice (for technical improvements, etc.)
• The corporate and merchandise names written on this folder are the trademark of the respective corporations • Inkjet printers print using extreme fine dots, so colours may vary after replacement of the printing heads, also note that if using multiple printer units, colours could vary slightly from one unit to other unit due to slight individual differences • Composer's errors reserved

New, small format LED UV printers...

Mimaki

www.mimakieurope.com info@mimakieurope.com @MimakiEurope

Mimaki Europe B.V. Stammerdijk 7E, 1112 AA Diemen, The Netherlands Tel: +31 (0)20 4627640



INDUSTRIAL PRODUCTS



eco

Mimaki

The world imagines... Mimaki delivers



the power to **create...**



High performance, state-of-the-art, small format LED UV printers

Mimaki's latest UJF-3042 MkII and UJF-6042 MkII flatbed LED UV printers bring increased productivity and ease of use to on-demand, direct to object printing. Available in A3 or A2 format, these new models build on Mimaki's peerless heritage to offer spectacular creativity and limitless opportunities when printing onto almost any material.

ENGINEERING EXCELLENCE AND CREATIVE INNOVATION

Founded in Japan in 1975, Mimaki Engineering has steadily grown by reputation and influence into a global company with large operational bases in Asia and the Pacific, United States and Europe.

Renowned for award-winning performance, peerless build quality and innovative technology, Mimaki has established itself as a leading manufacturer of wide-format inkjet printers and cutting machines for the sign and graphics, textile and apparel and industrial markets. In addition, Mimaki also provides a comprehensive range of supporting products; hardware, software and associated consumable items, such as inks and cutting blades.

From outdoor signage and billboards to interior decoration and furnishing, from packaging and labels to promotional gifts and apparel, Mimaki is committed to developing technology that sets new industry standards, producing machines and products that turn the imagination of our customers into breath-taking reality.

... **Mimaki delivers**

UJF-3042 / 6042 MkII delivers ...

- 20% increase in productivity when compared to UJF-3042/6042*1
- Direct printing on substrates up to 153mm thick
- MBIS bulk ink system with 250ml / 1,000ml bottles
- Full cover protection prevents dust affecting print quality
- Choice of LH-100 or LUS-120 inks, with up to 9 colours including white, clear and primer
- Exceptional print quality as a result of using Mimaki technologies including MAPS, MFD and variable dot
- Uninterrupted printing through the use of MCT, NCU and NRS technologies

LED UV CURING
610x420mm OR 300x420mm SIZES
153mm MAX MEDIA THICKNESS
OPTIONAL KEBAB FOR ROTARY PRINTING*2
1,200dpi MAX RESOLUTION
LH-100 & LUS-120 INKS
COLOUR LCD DISPLAY

*1 when printing in 600x600dpi, 8pass mode *2 available in 2017

UJF-6042 MkII



UJF-3042 MkII




* optional stand shown for both models

Create... Promotional items, Pens, Key rings, Small format signs & Point of sale, Phone and Electronics covers, Stationery, Bottles, USB sticks, Custom components, Boxes & packaging, Control panels and much more...


EXCEPTIONAL PRINT QUALITY ...

Mimaki Advanced Pass System (MAPS)
MAPS is Mimaki's unique anti-banding feature. Swath boundaries are overprinted and boundaries prone to banding are printed with fewer ink droplets.

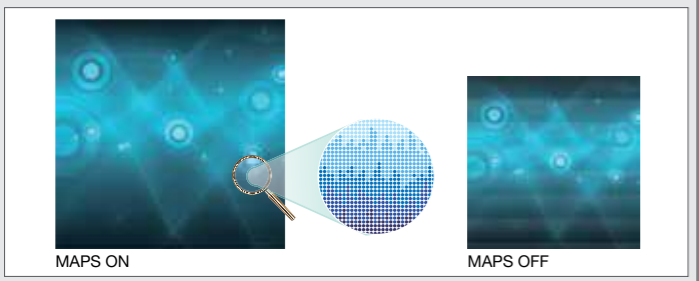

MFD—Mimaki Fine Diffusion

Dithering is an image processing technique, which transforms image data for inkjet printing. Pattern and error-diffusion dithering may, however, generate particular image noise resulting in uneven colour printing or tone jumps, even on a high-performance printing unit.




New RasterLink 6 software*, incorporates patented* image-processing MFD, which reduces noise due to dithering through hybrid processing of pattern- and error-diffusion dithering, thereby enhancing print quality.

* MFD is available for Version 4.0 and higher
* Patent number: 5230816

UNINTERRUPTED PRINTING ... HIGH CREATIVITY ...

Maintain high productivity levels

In the event of a nozzle malfunction not being repairable by the use of the maintenance function, printing can continue by the use of another nozzle, without any loss of productivity or a reduction in image quality.

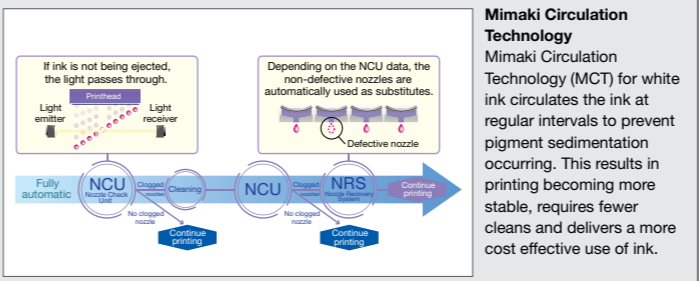

Mimaki Circulation Technology
Mimaki Circulation Technology (MCT) for white ink circulates the ink at regular intervals to prevent pigment sedimentation occurring. This results in printing becoming more stable, requires fewer cleans and delivers a more cost effective use of ink.

Two types of LED UV ink

LH-100 hard UV ink excels in scratch and chemical resistance as well as colour reproduction.

LUS-120 flexible ink has a wide colour gamut, good weather resistance and can be folded and stretched.

Both ink sets include CMYK LC, LM, White, Clear & Primer



Simultaneous white ink under and overprint

Print outstandingly colourful, bright images on transparent and coloured substrates with white ink under or overprint.



< sample prints on transparent acrylics >